

Ultra Slim Touch Screen Floor Standing




Overview



Round-the-clock operation

displays can be used as reliable digital signage for both offline and cloud based content 24 hours a day, 7 days a week.



Ultra Slim Design

The ultra-slim design offers a sleek, modern look, perfect for any space, combining style and functionality in a compact form.



up to 500 nits

Depending on the size, this display offers a brightness range of 350 to 500 nits, ensuring sharp and vivid visuals tailored for indoor environments with varying lighting conditions.



Full HD

ensures perfect colour and rich details in all possible broadcasting surroundings, ranging from shops, to restaurants and office buildings.



Anti-Glare

Optical technology diffuses mirror-like reflections and bright lights to help keep what's on your screen clear and visible.



Touch Capability

This display features touch capabilities, allowing you to interact with customers more effectively and efficiently.

Specifications 32"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH320 PLS
Size:	32"
Resolution:	1920 x 1080
Brightness:	350 cd/m2
Contrast (Typ):	1100 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	698,4 x 392,85 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 90 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 60 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 11
-----	------------



Connectivity


WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical

Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing

Technical 32"

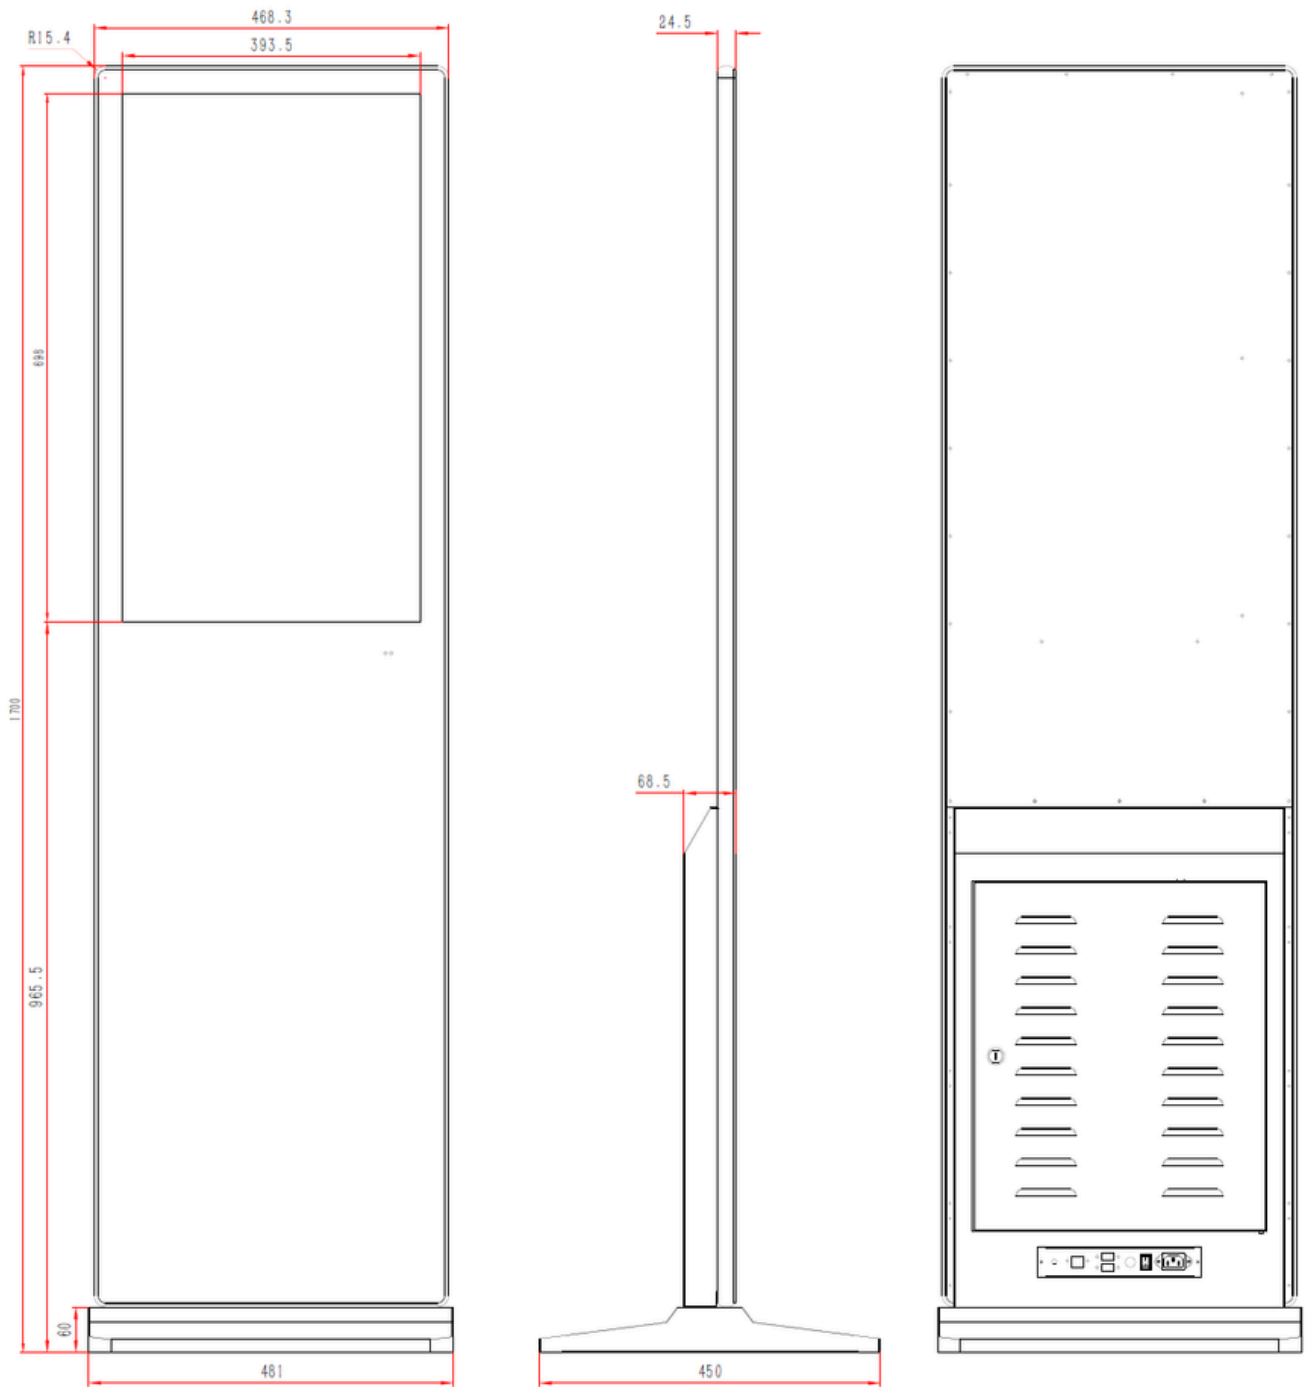

Specifications 43"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH430 PLS
Size:	43"
Resolution:	1920 x 1080
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	941,18 x 529,41 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	≥ 92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 90 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 11
-----	------------



Connectivity

WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical



Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing
Protection Glass:	AG Glass (optional)



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Technical 43"

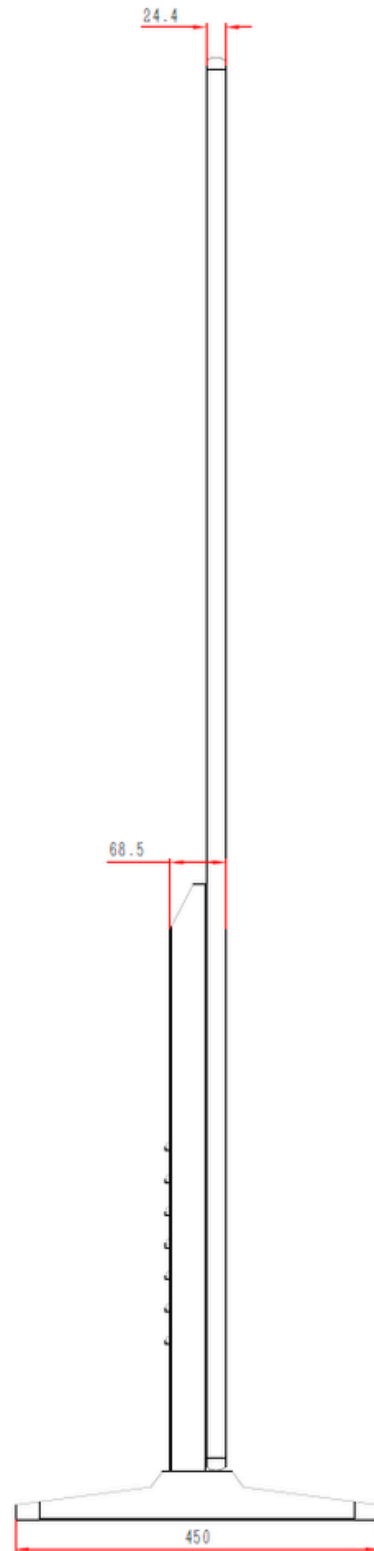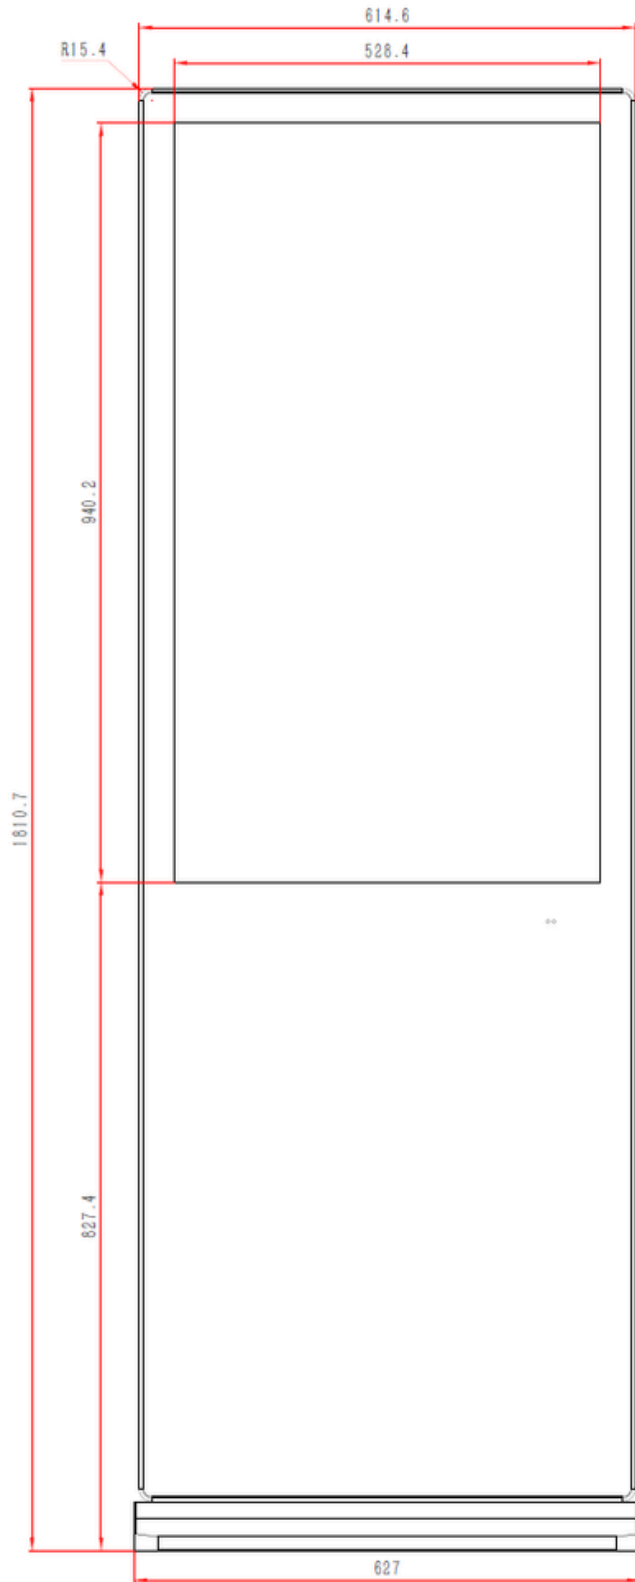

Specifications 55"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH550 PLS
Size:	55"
Resolution:	1920 x 1080
Brightness:	350-400 cd/m2
Contrast (Typ):	3500 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	1209,6 x 680,4 mm



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	≥ 92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	8192 x 8192
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 150 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 11
-----	------------



Connectivity

WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical




Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Technical 55"

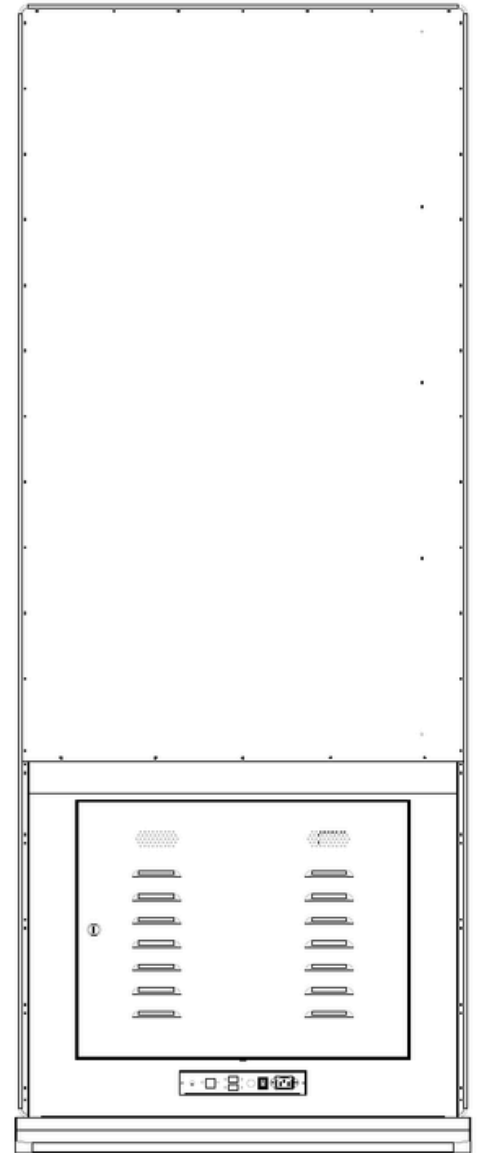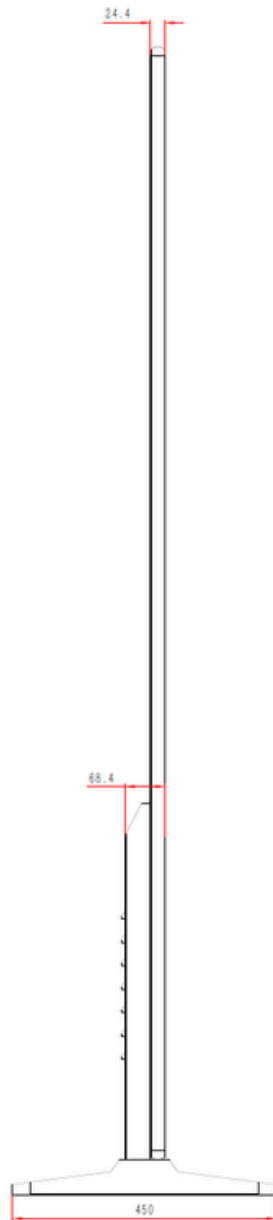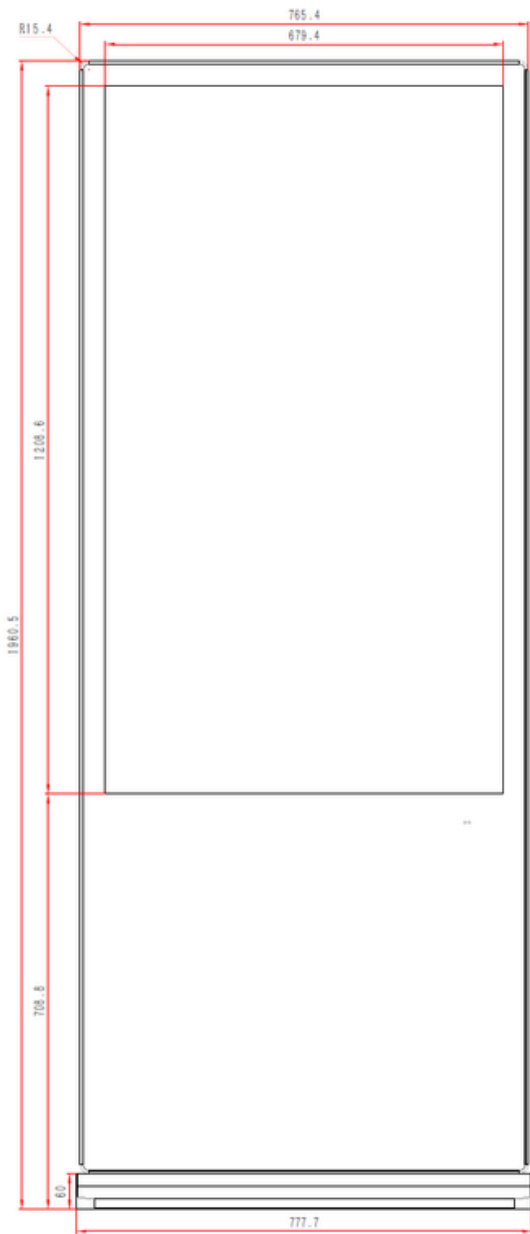

Specifications 65"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH650 PLS
Size:	65"
Resolution:	1920 x 1080
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	1428,48 x 803,52



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 220 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 11
-----	------------



Connectivity

WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical

Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Specifications 65"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH650 PLS
Size:	65"
Resolution:	1920 x 1080
Brightness:	350 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	5 ms
Aspect ratio:	16 : 9
Display Area W x H:	1428,48 x 803,52



Touch

Specification:	Capacitive Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 220 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS:	Android 11
-----	------------



Connectivity

WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical


Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Technical 65"

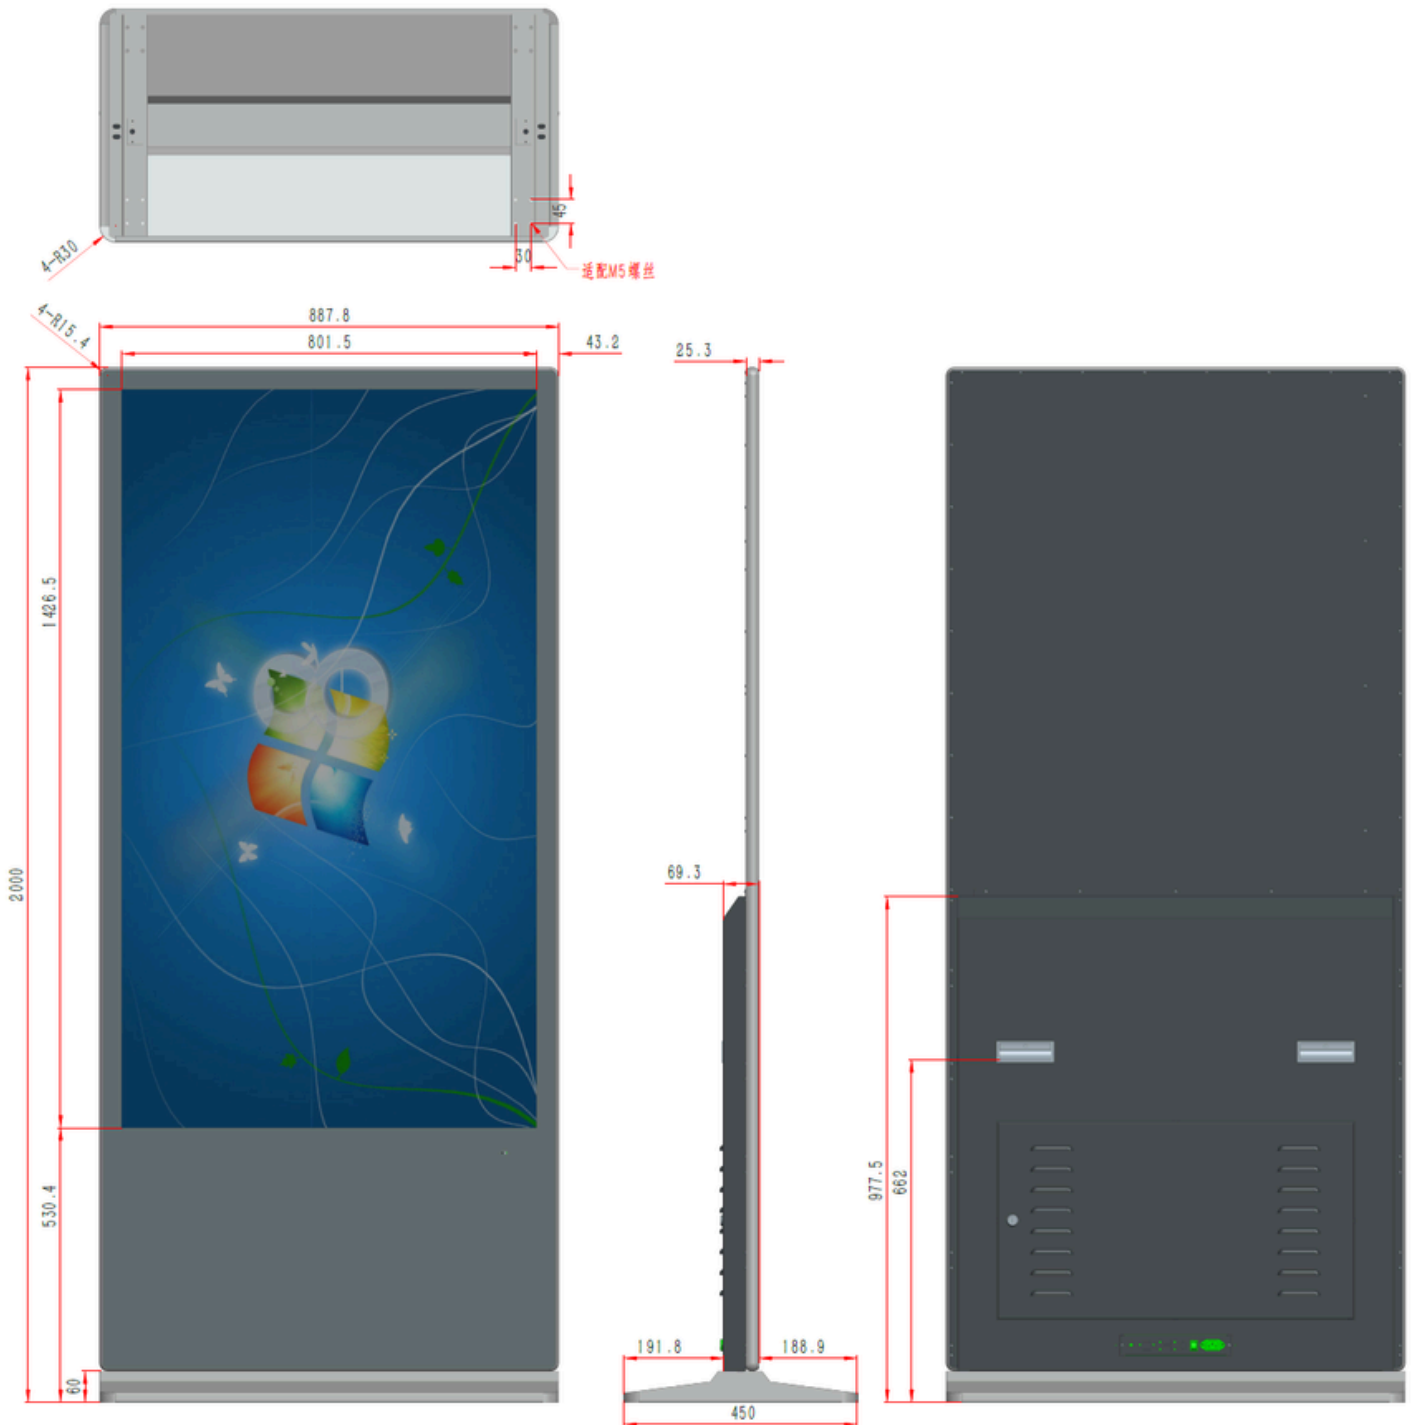

Specifications 75"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH750 PLS
Size:	75"
Resolution:	3840 x 2160 (4K)
Brightness:	500 cd/m ²
Contrast (Typ):	1200 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	929,5 x 1652,8 mm



Touch

Specification:	Capacitive Touch or Infrared Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 250 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS (optional):	Android 11
----------------	------------



Connectivity

WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical


Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Technical 75"

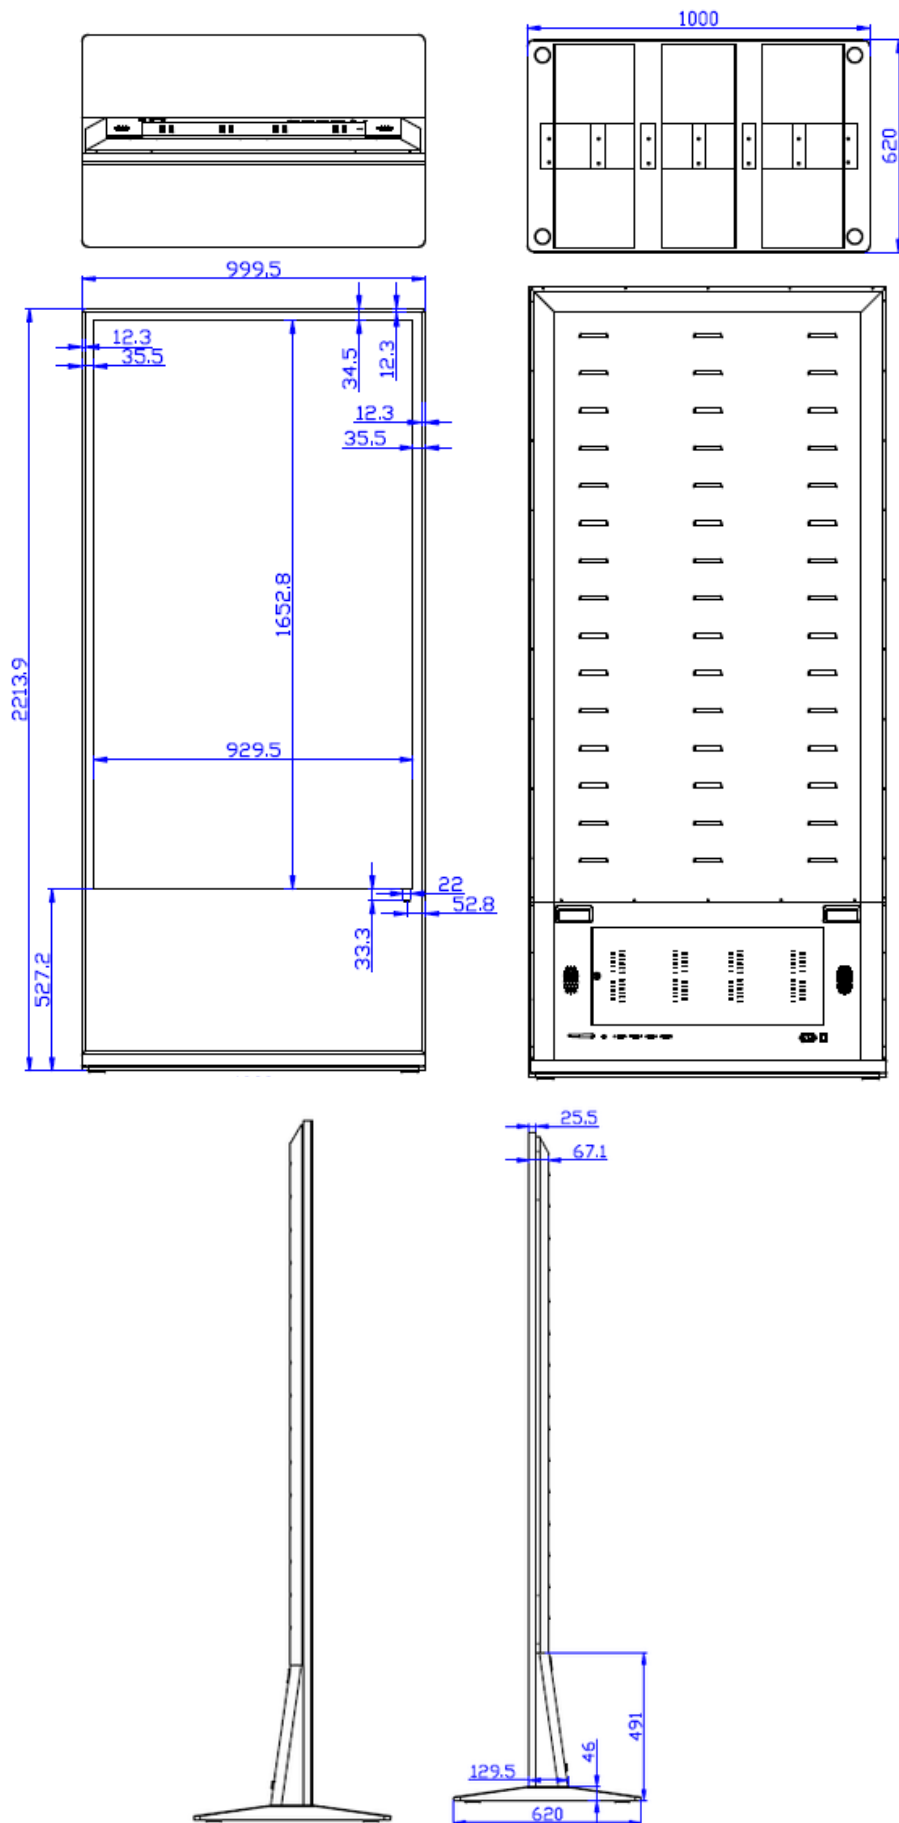

Specifications 86"



Panel

Panel Type:	TFT - LCD
Model No.:	US-TH860 PLS
Size:	86"
Resolution:	3840 x 2160 (4K)
Brightness:	500 cd/m2
Contrast (Typ):	1200 : 1
Orientation:	Portrait
Operating Hours:	24 / 7
Response time:	8 ms
Aspect ratio:	16 : 9
Display Area W x H:	1064,8 x 1895,3 mm



Touch

Specification:	Capacitive Touch or Infrared Touch
Positioning accuracy:	± 2mms
Transmittance:	92 %
Hardness:	7 H
Click manner:	10 points touch
Response Time:	≤ 10 ms
Output Resolutions:	4096 x 4096
Life Time:	More than 600 million times



Speaker

Built in speaker:	2 x 5 W (8Ω)
-------------------	--------------



Power

Input:	AC100V~240V 50/60 HZ
Max. Power Consumption:	≤ 250 W
Standby Consumption:	≤ 5 W



Environment

Operation Temperature:	0 ~ 50 C
Operation Humidity:	20% ~ 80 %



Operating System

OS (optional):	Android 11
----------------	------------



Connectivity

WLAN	2,4 GHZ
SIM	4G / 5G
HDMI in	1 x
VGA in	1 x
USB	1 x



Physical

Bezel Color:	Black, Metal case SPCC
Installation:	Floor Standing



Certification

Standard Certification:	CE, FCC, ROHS
Quality Standard:	ISO9001, CCC

Technical 86"

